TK165.SC

MADE IN ITALY

Serie Scorrevoli / Series Sliding

PANORAMA
PANORAMA

Termika®
ALUMINIUM SYSTEMS

Termika®
ALUMINIUM SYSTEMS

PANORAMA / PANORAMA

TK165.SC

Serie Scorrevoli / Series Sliding

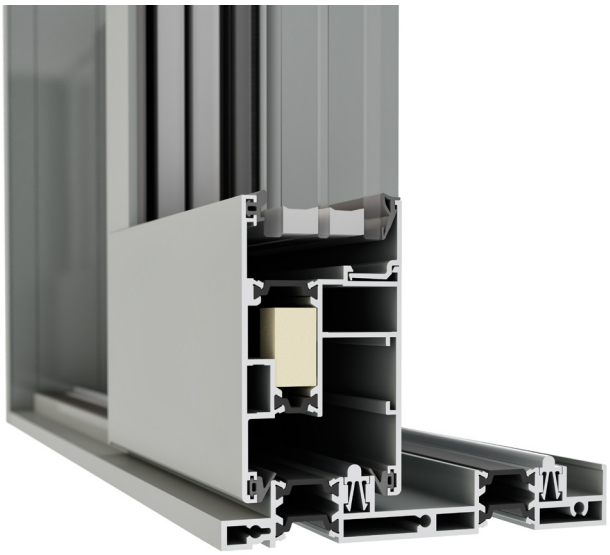

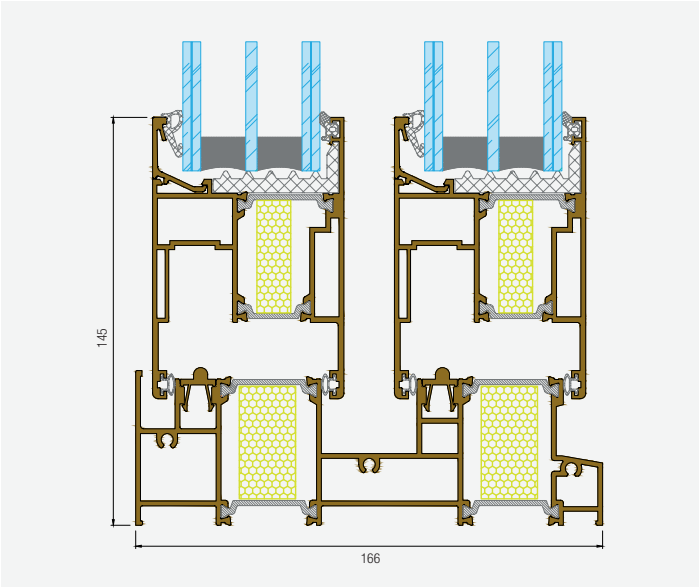

La serie Panorama TK165.SC si inserisce e si integra perfettamente nel contesto dei sistemi Termika®, completandone l'offerta con una serie scorrevole-alzante in alluminio, fortemente richiesta dal mercato per la sua versatilità e la sua estetica essenziale, con prestazioni di assoluto rispetto pur con un minimo ingombro delle sue sezioni.
Grandi specchiature ma nel contempo elevata sicurezza ed alto isolamento termo/acustico, fanno dello scorrevole "Panorama" di Termika® un serramento di grande effetto ed impatto emotivo da cui il nome.

The Panorama TK165.SC range fits and integrates perfectly in the context of Termika® systems, completing the offer with a sliding-lifting set in aluminium, strongly demanded from the market for its versatility and its essential aesthetics, with absolute performance compared even with a minimum size of its sections.
Large mirrors but at the same time high security and high thermal/acoustic insulation, make the sliding window "Panorama" of Termika® a frame to great effect and emotional impact, hence the name.

Telaio 166 mm - Anta 68 mm
Vetri fino a 52 mm.

Frame 166 mm - Door 68 mm
Glasses up to 52 mm.

ISOLAMENTO TERMICO*
UF - 1.95 W/m²K
UG - 0,5 - Psi 0,036
UW - 0.9 W/m²K

* dati relativi alla versione OPTIMUS (valori ottenuti su una porta-finestra 2 ante 2700×3350 mm)

THERMAL INSULATION*
UF - 1.95 W/m²K
UG - 0,5 - Psi 0,036
UW - 0.9 W/m²K

* data version OPTIMUS (values obtained on a 2 doors door 2700×3350 mm)

Versioni:
EXCELSIOR
OPTIMUS

Versions:
EXCELSIOR
OPTIMUS

Soluzioni proposte:

- Due, quattro o sei ante apribili su due o tre binari con soglia normale o ribassata (mm. 25).
- Soluzione fisso/apribile.
- Versione anche con nodo centrale minimal da mm. 50.
- Possibile vetrazione anche con triplo vetro fino a mm.52.
- Portata fino a kg. 400 per singola anta.
- Gamma colori illimitata (anche bicolore).

Solutions:

- Two, four or six doors that open on two or three tracks with normal or lowered threshold (mm. 25).
- Fixed/opening solutions.
- Version with minimal central node mm. 50.
- Possible even with triple glazing glass up to mm. 52.
- Capacity up to kg. 400 for each wing.
- Unlimited range of colours (also bicoloured).